



PP-H Ball Check Valve

454

Double union check valve with easy disassembly and excellent flow characteristics.

Material	PP-H
Size range	DN15-DN100 (1/2"-4")
Sealing ring	EPDM, FPM
Installation	Vertical or horizontal
Connection	DIN socket welding / butt welding



HUAGONG WEIYE

HUBEI HUAGONG WEIYE COMPLETE EQUIPMENT CO., LTD

Ball check valve technical data

球型逆止阀

BALL CHECK VALVE

描述：

- 提供材质：PVC-U, PVC-C, PP-H, PVDF。
- 尺寸：DN15-DN100(1/2"-4")。
- 密封圈：EPDM、FPM。
- 提供承插口标准：公制 DIN 、美标 ASTM、日标 JIS。
- 螺纹标准：NPT、BSPS、G。
- 方便拆装的活接端。
- 适合于垂直或水平安装。
- 耐多种无机化学品腐蚀。
- 流动特性好。

Description:

- Material: PVC-U, PVC-C, PP-H, PVDF.
- Size: DN15-DN100(1/2"-4").
- Seal ring: EPDM, FPM.
- Standard: provide socket metric DIN, ASTM, JIS.
- Thread standards: NPT, BSPS, G.
- Easy disassembling articulated.
- Suitable for vertical or horizontal installation.
- Resistance to many inorganic chemicals.
- Excellent flow characteristics.






PP-H ball check valve dimensions

球型逆止阀 PP-H 454 系列

BALL CHECK VALVE PP-H 454 SEVERS

球型逆止阀 PP-H 454--DIN(承插焊)


Ball Check Valve PP-H 454--DIN(Socket Welding)

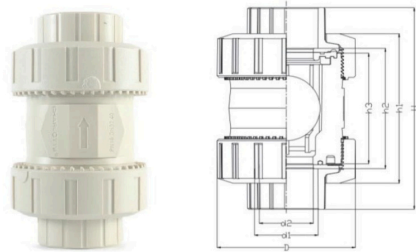

NOM		D	d1	d2	H	h1	h2	h3	承插焊/EPDM Code	承插焊/FPM Code
SIZE										
1/2"	DN15	54.7	20	15.5	86.6	65	55	48	454 40603	454 42603
3/4"	DN20	60.6	25	20.5	98	74.5	60	54	454 40704	454 42704
1"	DN25	73	32	26	117.5	84.5	73.5	64	454 40805	454 42805
1 1/4"	DN32	100	42	37	161.2	124.3	99.2	92	454 40906	454 42906
1 1/2"	DN40	100	50	41	161.2	124.3	99.2	92	454 41007	454 43007
2"	DN50	124	63	51	182.5	134.5	106.5	100	454 41108	454 43108
2 1/2"	DN65	164	75	64	249	185	149	137	454 41209	454 43209
3"	DN80	200	90	80	269	202	167	145	454 41310	454 43310
4"	DN100	234	110	96	312	228	190	165	454 41411	454 43411

球型逆止阀 PP-H 454--DIN (对焊)

Ball Check Valve PP-H 454--DIN (Butt Welding)

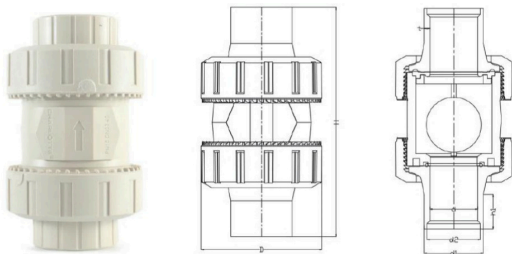

NOM		D	d1	d2	d	H	h1	t	对焊/EPDM Code	对焊/FPM Code
SIZE										
1/2"	DN15	54.7	20.1	16.3	15.5	154.6	40	2.3	454 41603	454 43603
3/4"	DN20	60.6	25.1	21.3	20.2	166.5	43	2.5	454 41704	454 43704
1"	DN25	73	32.1	27.3	26	183	47	3.1	454 41805	454 43805
1 1/4"	DN32	100	40.2	35.4	32.2	204.4	35	4	454 41906	454 43906
1 1/2"	DN40	100	50.2	44	41	220.6	39	4.6	454 42007	454 44007
2"	DN50	124	63.2	57	51	236.5	37	6.1	454 42108	454 44108
2 1/2"	DN65	164	75.2	68	64	389	95	5.6	454 42209	454 44209
3"	DN80	200	90.4	81.8	80	427	100	5.2	454 42310	454 44310
4"	DN100	234	110.5	99.9	96	486	125	7.3	454 42411	454 44411